


# Pro.2®

## HDMI Converter

### Operating Instructions

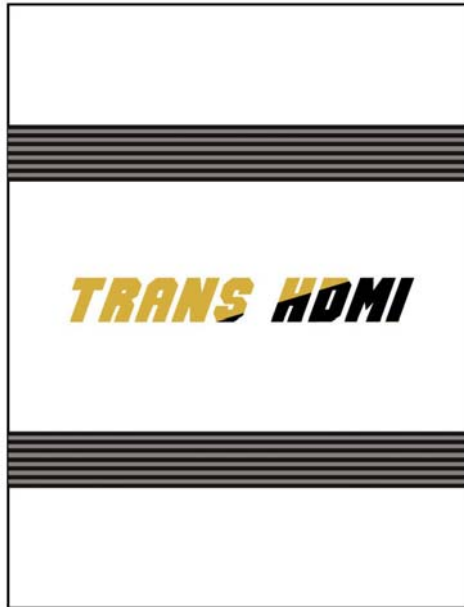

#### Dear Customer

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

#### FEATURES

- Easy to use: Install in seconds, no need for configuration.
- Conversion: It converts DVI and SPDIF audio into complete HDMI signal.
- HDCP compliant.

#### NOTICE

Pro.2 reserves the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

#### TABLE OF CONTENTS

Specifications  
 Package Contents  
 Panel Descriptions  
 Connecting and Operating  
 Maintenance  
 Product service

#### SPECIFICATIONS


Operating Temperature range.....15 to +35°C (-41 to +95°F)  
 Operating Humidity range..... 5 to 90%RH (No Condensation)  
 Input Video signal ..... 0.5-1.0 Volts P-P  
 Input DDC signal..... 5 volts p-p(TTL)  
 Maximum Single Link Range ..... 1280x1024, 1080P  
 Output Video .....HDMI+HDCP 1.0/1.1  
 Power Consumption ..... 8 Watts (max.)  
 Power adapter format Input .....AC (50Hz-60Hz) 100V-240V; Output: DC5V, 1A  
 Dimension (W×H×D) ..... 67mm x 88mm x 28mm  
 Weight..... 150g

**Note: Specifications are subject to change without notice. Mass and dimensions are approximate.**


#### PACKING CONTENTS

- 1) Main Unit. DVI TO HDMI Converter
- 2) 5VDC / 1A Power Supply.
- 3) Operating Instructions

## PANEL DESCRIPTIONS

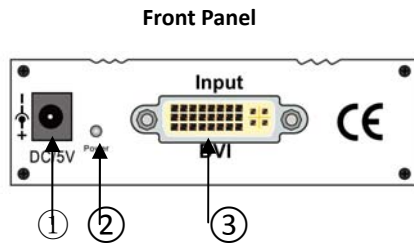

- 1) Power input.
- 2) Indicator of Power input: When power is on the corresponding LED lights.
- 3) DVI input port (Video only).

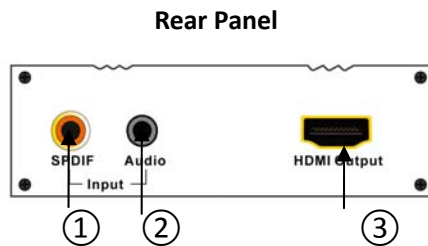

- 1) SPDIF digital audio input
- 2) R/L audio input
- 3) HDMI output port.

## CONNECT AND OPERATE

- 1) Connect the input source into DVI converter (Input cables are optional)
- 2) Connect the HDMI device into the HDMI output of DVI converter
- 3) Insert the DC side of 5V power supply into DVI converter and then connect the AC side of the power supply into the wall outlet.

**Attention: Insert/Extract cable gently.**

## MAINTENANCE

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzene to clean this unit.

## PRODUCT SERVICE

- 1) **Damage requiring service:** The unit should be serviced by qualified service personnel if:
  - (a) The DC power supply cord or AC adaptor has been damaged;
  - (b) Objects or liquids have gotten into the unit;
  - (c) The unit has been exposed to rain;
  - (d) The unit does not operate normally or exhibits a marked change in performance;
  - (e) The unit has been dropped or the cabinet damaged.
- 2) **Servicing Personnel:** Do not attempt to service the unit beyond that described in these operating instructions. Refer all other servicing to authorized servicing personnel.
- 3) **Replacement parts:** When parts need replacing ensure the servicer uses parts specified by the manufacturer or parts that have the same characteristics as the original parts. Unauthorized substitutes may result in fire, electric shock, or other hazards.
- 4) **Safety check:** After repairs or service, ask the servicer to perform safety checks to confirm that the unit is in proper working condition.