

2-Terminal (1-Speaker) Wall Plate
4-Terminal (2-Speaker) Wall Plate
8-Terminal (4-Speaker) Wall Plate

CONTENTS

Flat mounting brackets	(2)
Formed mounting brackets	(2)
Bracket screws	(4)
Short screws	(2)

MOUNTING LOCATION

Select a location for the wall plate where:

1. You can connect to existing wiring or you can easily run the wire through the wall/walls to the wall plate.
2. The location does not interfere with existing electrical wiring or obstructions in the wall.

INSTALLATION

Note: To avoid possible damage.

When connecting the speaker wire to the wall plate terminals do not allow the + positive & - negative wires or strands to touch one another when the equipment is turned on.

Turn all equipment off or unplug while making connections.

You can mount your Speaker Wall Plate using a standard electrical switch box or the supplied mounting brackets.

Connecting wires to the wall plate & Installing

Strip the insulation from the ends of the speaker wire approximately 1/2", exposing the bare wires. Twist all the strands of each wire together and ensure all the wire strands are secured in the holes of the terminals avoiding any contact with other terminals.


1. Turn the wire connectors counter-clockwise to access the terminal holes.
2. Insert the + wires in the red banded terminals and the - wires in the black banded terminals.
3. Secure the wire by turning the bands

clockwise while avoiding over tightening the connector.

4. Repeat the above while connecting wires to the front and back of the wall plate.



Installing with a Standard Switch Box

Use the two short screws to attach the wall plate to the electrical switch box.

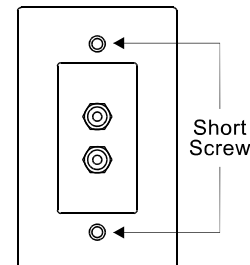

Installing with mounting brackets

1. Identify the installation location on the wall that is clear of obstructions and any electrical wiring.
2. Draw a rectangle 1 3/4" wide x 4" long (4.4 cm x 10.2 cm) on the wall.
3. Drill a small hole in a corner of the rectangle. (See diagram)
4. Use a keyhole or saber saw to cut out the hole and run the wiring through the cut out.
5. Follow the installation instructions for connecting the wires to the wall plate.
6. Assemble the two mounting brackets using the supplied screws.

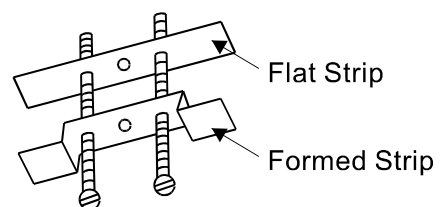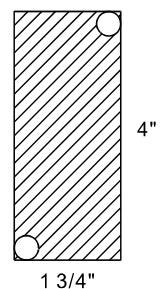

7. Position the brackets in the cut out the same distance apart to match the holes in the wall plate.
8. Attach the wall plate to the mounting brackets using the supplied short screws.
9. Connect the wires as indicated in the wiring instructions.