


Operation Instruction

Wireless Battery Operated Door Bell

A. Function

1. Wireless battery operated door bell, easy installation.
2. Random code, low recurrence rate.
3. With LED indicates in the receiver.
4. Max. Remote range: 40 meters in open area.
5. Transmitter with waterproof function
6. Transmitter with name card
7. 4 selectable melodies

B. How to install the remote control

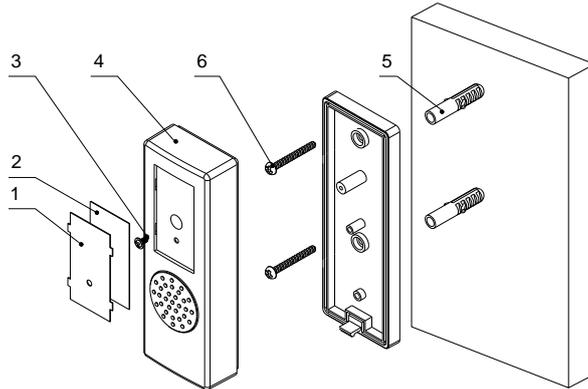

1. Remove the transparent PVC foil.
2. Remove the name card.
3. Disassemble the front cover screw.
4. Open the cover and put off the insulating strip of the battery.
5. Install the matched screw on the wall or the door according to the screw hole position of rear cover.
6. Use the matched screw to fasten the rear cover on the wall or the door.
7. Reinstall the front cover, screw, name card and transparent PVC foil successively.

C. How to install battery

Transmitter: Remove the waterproof plastic card and the name card then remove the screw and open the upper casing.

Place the battery into the battery holder then close the casing and screw it,
Put the waterproof plastic card and name card back to the product.

Receiver: Open the battery cover and place the battery into the battery holder and close the battery cover.

D. Channel-select

Press and hold the “**CODE**” key on the **Receiver** about 3 seconds until the third LED flash, enter channel-select state; time of the channel-select state will keep about 15 seconds, now press the key on **Transmitter**, the LED on the **Receiver** will stop flashing if channel-select succeed. You can press the **Transmitter** key to use the doorbell now. It will exit the channel-select state after 15 seconds if channel-select defeated.

E. Select sounds

Press the “**SELECT**” key, then select the melody you like.

F. Specification

1. Transmitter battery: 1 pc CR2032,3V
Receiver battery: 2 pcs AA,1.5V
2. Radio frequency: 433.92MHz
3. Max. range: 40 meters in open area
4. Melody options: melody selectable

CAUTION: WALLS, METAL FRAMES AND ELECTRICAL INTERFERENCE WILL REDUCE THE OPERATING DISTANCE!