


DVR8CH 8 CHANNEL H.264 NETWORK DVR

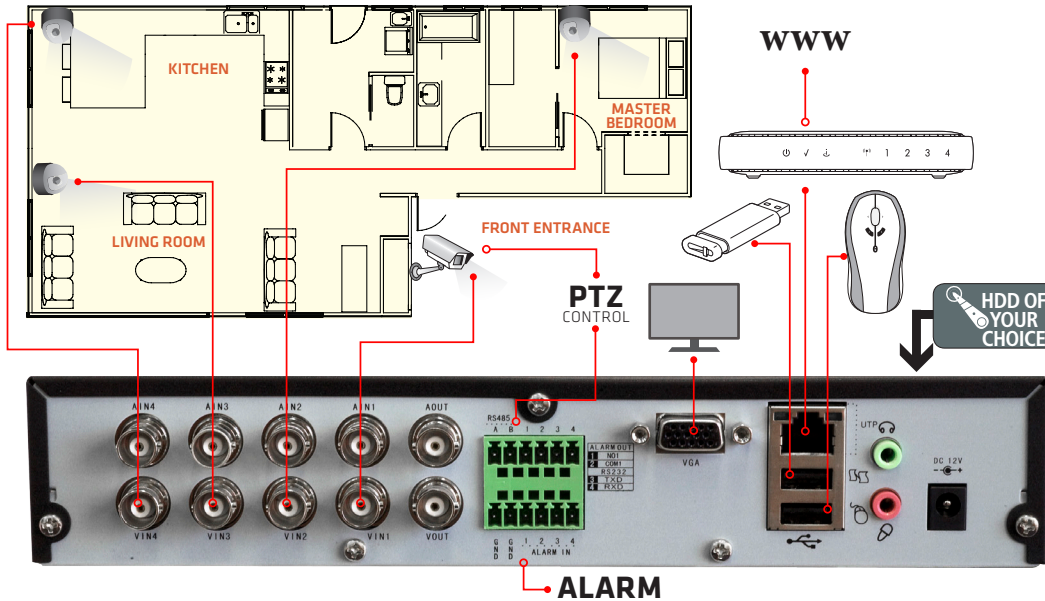

- H.264 (main profile)/ MJPEG video compression
- Simultaneous 1/4CH playback
- Multiplex, PPPoE, DHCP, SATA HDD support
- USB2.0 backup
- Dual stream bit
- Web access via IE
- **Email Alert**
Sends log, picture, IP information to the appointed mailbox when alarm is activated
- 16-bit colour menu with user friendly OSD
- Support schedule recording, 120 preset schedule tasks
- Search recording by time and day

Compression	H.264 (main Profile)/ MJPEG
Video Input	8x BNC video inputs/ 1x BNC + 1x VGA output
AUDIO	1CH BNC in/ 1CH BNC out with INTERCOM support
Display Resolution	D1: 704x576 (PAL) @ 25 FPS/ 704x480 (NTSC) @ 30 FPS
Recording Resolution	CIF: 352x288 (PAL) @ 25 FPS/ 352x240 (NTSC) @ 30 FPS (All real time flexible)
Recording Quality	5 Levels (Basic, Medium, Good, High, Best)
Recording modes	Manual, motion (396 grid blocks), Timer, Alarm trigger, Auto start, Pre-recording
Video output stream	64k-2M bps adjustable
Playback	4CH playback simultaneously
HDD	SATA interface, Max. 2TB HDD
ALARM	Input: 8CH / Output: 1CH
Mobile Support	iPhone, Symbian, Windows Mobile software
Network	RJ45, auto adapt 10/100M Ethernet, support PPPoE & DHCP
Backup	Flash drive or external hard disk via back USB 2.0 port
Mouse	USB1.1 port for connecting a USB mouse (included)
Communication port	RS485 port
Power supply	DC 12V/3A (included)
Weight/ Size	2.3KG/ 250 (W) x 260 (H) x 50 (D) mm

Order Code: 43170805

Warranty: 12 months




Download Software

Download software for your iPhone from the app store (search for DvrClient) and from the DOSS web site for your Windows mobile or Symbian phone.



Included USB mouse

Easily setup your DVR using the included the mouse



Included mini remote

Package contents:

- Card size remote control
- Mini USB Mouse
- Power supply
- User manual



CAN'T SCAN QR CODES?
DOWNLOAD SCANLIFE
FROM YOUR APP MARKET.