

RFD2169BF RF MODULATOR WITH 'F' CONNECTOR



LED CHANNEL DISPLAY

Order Code: 37400012

Warranty: 12 months

72db uV RF OUTPUT


ideal for splitting signals and cascade surveillance systems

CONNECT ANY AV DEVICE VIA SCART, COMPOSITE AV, OR RF AND OUTPUT TO ANY TELEVISION WITH AN RF OR SCART INPUT

Insert your favourite video program, such as DVD, Satellite Receiver, Digital Set Top Box etc. to a TV without RCA connector through this RFD-2169BF Video RF Modulator and you can also share to several TVs in your home through your RF distribution network.

Features:

- SCART Input/output and 1 RCA input
- Antenna input
- Antenna output (TV)
- DC power supply input
- ON/OFF switch
- Channel Adjustment (Up/Down key)
- LED Channel Number display

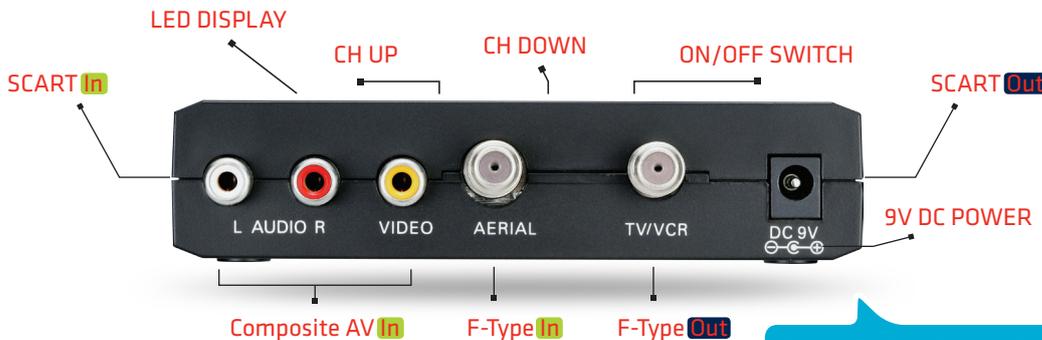

IDEAL FOR PERMANENT (IN-WALL, IN-CEILING) INSTALLATIONS

Specifications:

RF Input	45~862MHz
Input Connector	F Female,75 Ohm
Output	CH 21-69
Output (combined)	45~862MHz
Output connector	F Female,75 Ohm
Video & Audio Input	RCA/SCART
Output	SCART(Loop Through)
Video Input impedance	75~1.3K ohm
Video S/N	40dB min
Audio Input impedance	10K
Ohm Powering	9V
Power:	240VAC (9V DC @ 200mA)

Package contents:

- 200mA 9V DC power supply
- 1m F plug to PAL plug lead